




**SERIES CEE-Ex
PLUG**
CODE 477413EX

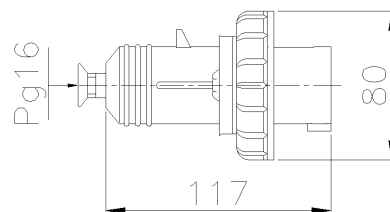

Datasheet

Specifications

Net Weight	188 G
Rated current	16A
Frequency	50/60Hz
IP Protection degree	IP66
Poles	3P+ $\perp$
Clock Position	6h
Rated operating voltage	400V ●
Rated insulation voltage	500 V V
Manufacturing material	Technopolymer Recyclable Palazzoli
Execution	Mobile
Hole type	Pg16
Standard plug-socket	IEC 60309-2

Reference Standards and Directives

Certification and approval marks EX, NYCE COLOMBIA, CE

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE),
2014/34/EU (ATEX), 2014/35/EU (LVD)

Reference Standards EN 50581:2012, EN 60079-0/A11:2013, EN
60079-0:2012, EN 60079-15:2010 , EN
60079-31:2014, EN 60309-1:1999, EN 60309
-1:1999/A1:2007, EN 60309
-1:1999/A1AC:2014, EN 60309
-1:1999/A2:2012, EN 60309-2:1999, EN
60309-2:1999/A1:2007, EN 60309
-2:1999/A2:2012, EN IEC 63000:2018

Atex characteristics

ATEX application zone	Zona/Zone 2 and 22
Dust ATEX execution (Tmax1)	II 3D - Ex tc IIIC T65 °C Dc
Gas ATEX execution (Tmax1)	II 3G - Ex nA IIC T6 Gc

The images are purely indicative. Palazzoli reserves the right to make changes without notice.