





Product: [RST 5-3-VAD 1A-1-3-226](#)

DIN EN 175301-803-A, Cordset, double ended: M12, Male, Straight, 3-Pole, to a, Form A, Female, Angled, 2+2PE, Yellow LED with Varistor: Cable, PUR, black, 3x0.50 mm²

Product Description

DIN EN 175301-803-A, Cordset, double ended: M12, Male, Straight, 3-Pole, to a, Form A, Female, Angled, 2+2PE, Yellow LED with Varistor: Cable, PUR, black, 3x0.50 mm²

Technical Drawing

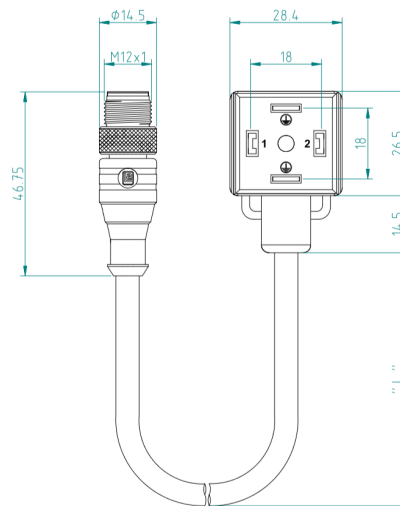

Technical Specifications

Product Description

Product Family:	Valve Connectors
Brand:	Lumberg Automation
Connector Type:	Cordset, double ended
Shielding:	Unshielded
Rated Voltage:	24 V
Rated Impulse Voltage:	1.5 kV
Operating Voltage:	24 V AC/DC
Rated Current*:	4 A

Technical Data Side 1

Product Sub Family:	M12
Type of Contact / Gender:	Male

Connector Design:	Straight
Attachment Type:	Coupling Screw
Number of Pins:	3
Coding:	A
Contact Resistance:	≤ 10 mOhm
Insulation Resistance:	> 10 ⁹ Ohm
Mating Cycles:	≤ 100
Ambient Temperature (Operation)*:	- 40 °C - + 90 °C
Protection Degree / IP Rating**:	IP65
Design Standard:	IEC 61076-2-101
Pollution Degree:	3 acc. to DIN EN 60664-1 (VDE 0110-1)
Overvoltage Category:	III acc. to DIN EN 60664-1 (VDE 0110-1)
Contact Base Material:	CuSn
Contact Plating:	Cu/Au
Contact Bearer Material:	TPU
Contact Bearer Color:	Orange
Flammability Class (Contact Bearer):	UL 94 HB
Molded Body Material:	TPU
Molded Body Color:	Grey Translucent
Flammability Class (Molded Body):	UL 94 HB
Attachment Material:	CuZn
Attachment Plating:	Ni-Plated
Function Indicator:	Yellow LED
Protective Circuit:	Varistor
Fastening Torque (Attachment):	M 12x1: (50-60) Ncm, hand-tight
Note:	Do not connect or disconnect under load.

Cable Data

Cable Number:	226
Conductor Size:	0.5 mm²
Number of Wires:	3
Minimal Bending Radius (Fixed Inst):	> 5 x D
Minimal Bending Radius (Flexible Inst):	> 10 x D
Cycles (Bending):	> 5 M
Cycles (Torsion):	> 5 M @ ± 360 °/1 m
Conductor material:	Cu
Cable Jacket Material:	PUR
Cable Jacket Color:	black
Cable Diameter D:	ø 4.6 ± 0.2 mm
Wire Insulation Material:	PP
Insulated Wire Diameter:	ø 1.50 mm
Ambient Temperature (Fixed Installation):	- 50 °C - + 105 °C (UL: + 80 °C)
Ambient Temperature (Flex Installation):	- 25 °C - + 105 °C (UL: + 80 °C)
Ambient Temperature (Drag Chain Inst):	- 25 °C - + 60 °C
UL Cable Type:	AWM: 20549
Flammability Class (Cable Jacket):	DIN EN 50265-2-2, VDE 0482-265-2-2, IEC 60332-2-2, CSA FT2
Cable Characteristics:	Good microbes and hydrolysis resistance; Mainly plasticizer diffusion free; Exclusion of PVC and silicone; Coldness flexibility; Free of lacquer wetting disturbing substances

Technical Data Side 2

Product Sub Family, Side 2:	VAD
Type of Contact / Gender, Side 2:	Female
Connector Design, Side 2:	Angled
Attachment Type, Side 2:	Central Screw
Number of Pins, Side 2:	2+2PE
Coding, Side 2:	A
Contact Resistance, Side 2:	≤ 5 mOhm

Insulation Resistance, Side 2:	> 10^9 Ohm
Mating Cycles, Side 2:	50
Ambient Temperature (Operation), Side 2*:	-25°C to +80°C
Protection Degree / IP Rating, Side 2**:	IP65
Design Standard, Side 2:	DIN EN 175301-803-A
Pollution Degree, Side 2:	3 acc. to DIN EN 60664-1 (VDE 0110-1)
Overvoltage Category, Side 2:	III acc. to DIN EN 60664-1 (VDE 0110-1)
Contact Base Material, Side 2:	CuZn
Contact Plating, Side 2:	Cu/Ni,Sn
Contact Bearer Material, Side 2:	PBT
Contact Bearer Color, Side 2:	Black
Flammability Class (Contact Bearer), Side 2:	UL 94 V-0
Molded Body Material, Side 2:	TPU
Molded Body Color, Side 2:	Translucent
Attachment Material, Side 2:	Steel, Phillips combi slot
O-Ring Material, Side 2:	Molded Integrated Gasket
Fastening Torque (Attachment), Side 2:	(50-60) Ncm

Safety & Environmental Compliance

RoHS Compliant:	yes
-----------------	-----

Resistances

Halogenfree:	no
Oil Resistance:	Good chemical and oil resistance

Notes

Protection Degree / IP Rating Note:	** only if mounted and locked in combination with Hirschmann / Lumberg Automation connector.
Note Derating:	Notice derating
Update and Revision:	Revision Number: 0.57 Revision Date: 05-02-2023

Variants

Item #	Item Description	Cable Length
11910	RST 5-3-VAD 1A-1-3-226/0,3 M	0.3 m
11911	RST 5-3-VAD 1A-1-3-226/0,6 M	0.6 m
11912	RST 5-3-VAD 1A-1-3-226/1 M	1 m
11913	RST 5-3-VAD 1A-1-3-226/1,5 M	1.5 m
11914	RST 5-3-VAD 1A-1-3-226/10 M	10 m
11915	RST 5-3-VAD 1A-1-3-226/2 M	2 m
11916	RST 5-3-VAD 1A-1-3-226/3 M	3 m
11917	RST 5-3-VAD 1A-1-3-226/5 M	5 m
43786	RST 5-3-VAD 1A-1-3-226/4 M	4 m
54563	RST 5-3-VAD 1A-1-3-226/2,5 M	2.5 m
72781	RST 5-3-VAD 1A-1-3-226/6 M	6 m
81765	RST 5-3-VAD 1A-1-3-226/8 M	8 m
93777	RST 5-3-VAD 1A-1-3-226/3,5 M	3.5 m
934637346	RST 5-3-VAD 1A-1-3-226/7,5 M	7.5 m
44362	RST 5-3-VAD 1A-1-3-226/15 M	15 m
21825	RST 5-3-VAD 1A-1-3-226/25 M	25 m
17051	RST 5-3-VAD 1A-1-3-226/7 M	7 m
2181	RST 5-3-VAD 1A-1-3-226/0,4 M	0.4 m
34487	RST 5-3-VAD 1A-1-3-226/1,2 M	1.2 m

regulations based on their individual usage of the product.